

PA02M Power supply

(GFM dedicated power supply)




«Features»

- Compact size
(W135 xH60 (Excluding protrusions) xD60mm)
- 5 line connection
※Please use within the power output range.
- Meter (GFM) power supply: ± 15 VDC
- Display power supply : + 5 VDC

[Specification]

Model		PA02M
Output power	GFM power supply	+15 VDC : 0.3A -15 VDC : 0.2A
	Display power supply	+5 VDC : 2A
Number of connection		Maximum : 5
Flow output signal		Analog 0 - 5 VDC ※Output to the display when the cable is connected.
Connector		B5B-XH-A(LF)(SN) : Display (5 core) B6B-XH-A(LF)(SN) : GFM (6 core)
Operating environment		5 - 50°C 、 ≤85%RH (No condensation permitted)
Input Power		AC100 - 240 V

«Dimensions»

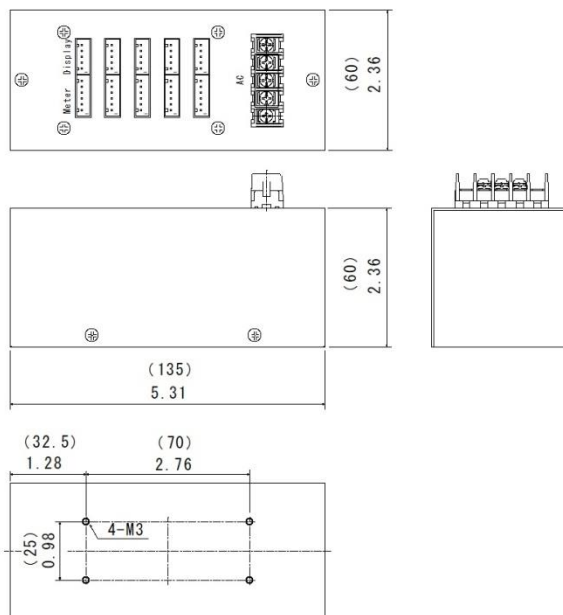


All dimensions are in inches with [mm] in brackets.


※Fixing screw (M3): The screwing depth into the housing should be up to 2 mm.

«Optional»


- Signal cable between GFM and PA02M
Model : SC - M - *

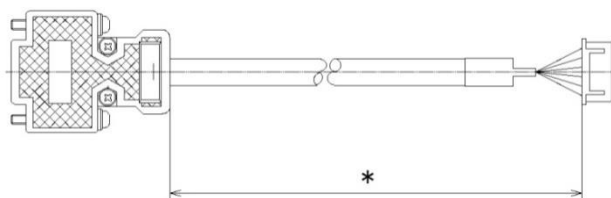

- Signal cable between PA02M and Digital panel meter
Model : SC - PM - *

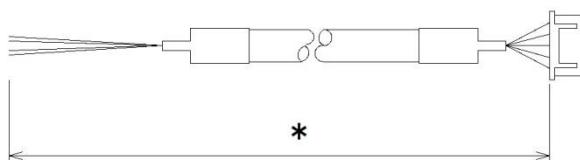

- Digital panel meter with signal cable
Model : SC - DMP - *

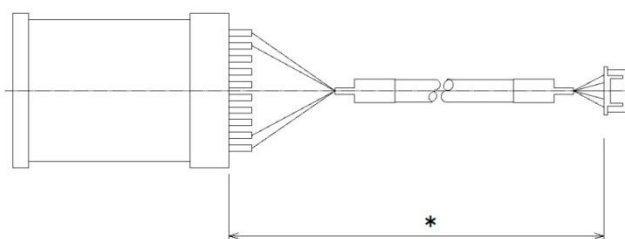

- ※ Standard length of signal cable 1 , 2 , 3 m (More than 4m is order made.)
- ※ *The choice of cable length.
e.g. Model : SC - M - 1M

Model*	Cable length
1M	1m
2M	2m
3M	3m